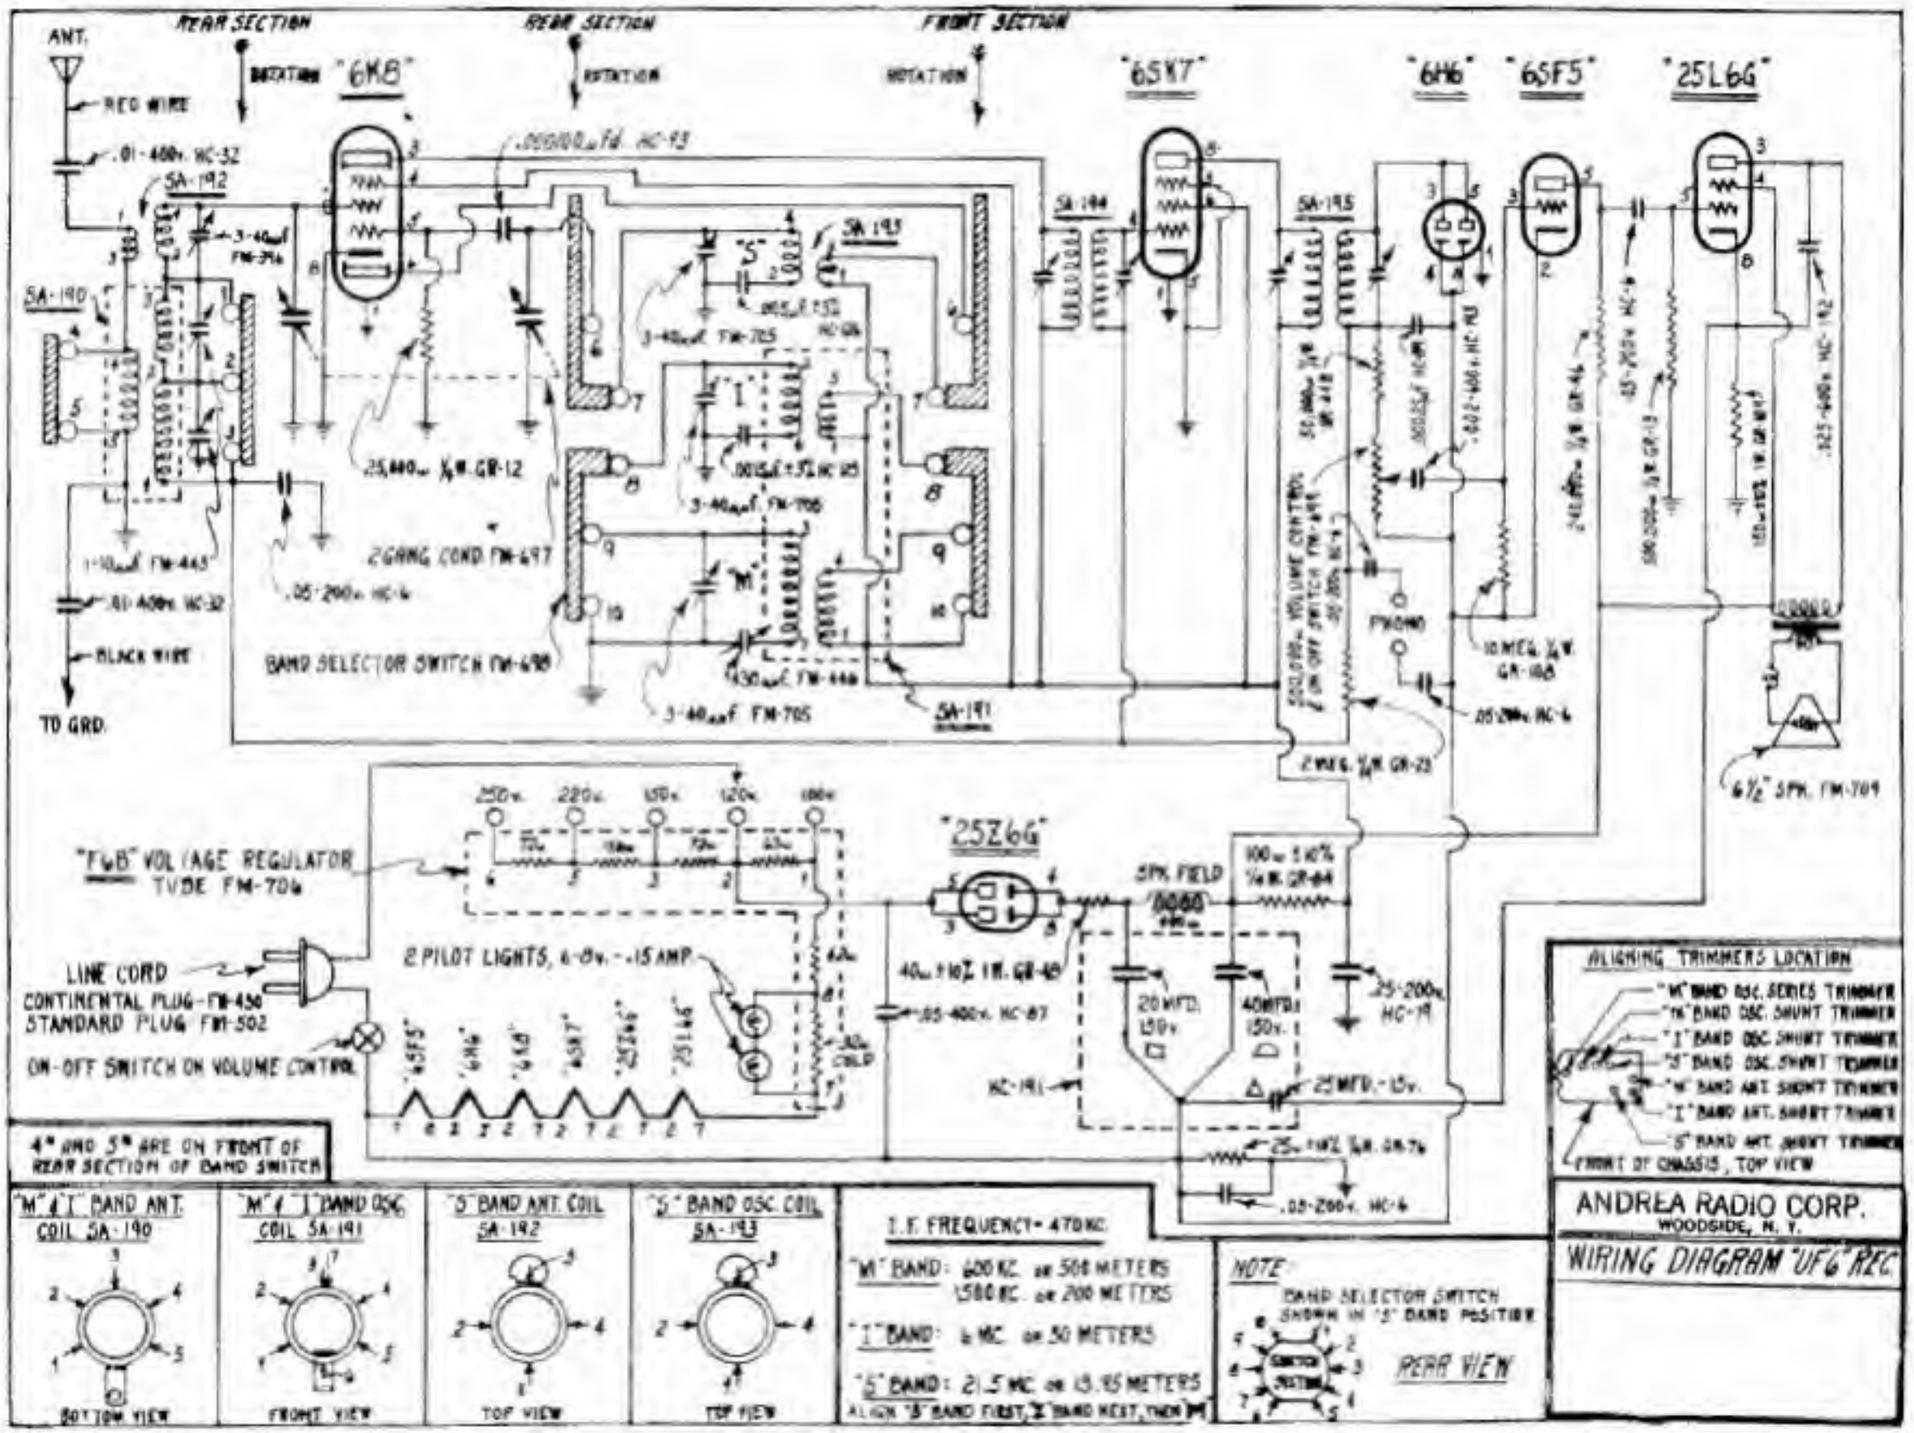
ANT.
RED WIRE
.01-400v. MC-32
SA-192
SA-190
3-40 mmf FM-704
1-10 mmf FM-445
.01-400v. MC-32
BLACK WIRE
TO GRD.
REAR SECTION
ROTATION
"6K8"
.000100 mfd. MC-93
25,000 ohms ½W. GR-12
2 GANG COND. FM-697
.05-200v. MC-6
BAND SELECTOR SWITCH FM-698
3-40 mmf FM-705
3-40 mmf FM-706
3-40 mmf FM-707
.005 mfd. MC-125
430 mmf FM-446
SA-191
SA-193
SA-194
SA-195
"6SK7"
"6H6"
"6SF5"
"25L6G"
.002-400v. MC-82
10 MEG. ½W. GR-108
.05-200v. MC-6
2 MEG. ½W. GR-23
PHONO
6½" SPK. FM-709
"FWB" VOLTAGE REGULATOR TUBE FM-704
250v. 220v. 150v. 120v. 100v.
"25Z6G"
LINE CORD
CONTINENTAL PLUG-FM-450
STANDARD PLUG FM-502
ON-OFF SWITCH ON VOLUME CONTROL
2 PILOT LIGHTS, 6-8v. - .15 AMP.
"6SF5" "6H6" "6K8" "6SK7" "25Z6G" "25L6G"
SPK. FIELD 1000 ohms
100 ohms 5 WATT WIRE WOUND
40 ohms 10% 1W. GR-40
.05-400v. MC-87
20 MFD. 150v.
40 MFD. 150v.
25-200v. MC-19
25 MFD. - 15v.
25 ohms ½W. GR-74
.05-200v. MC-6
MC-191
4" AND 5" ARE ON FRONT OF REAR SECTION OF BAND SWITCH
"M" & "I" BAND ANT. COIL SA-190
BOTTOM VIEW
"M" & "I" BAND OSC. COIL SA-191
FRONT VIEW
"S" BAND ANT. COIL SA-192
TOP VIEW
"S" BAND OSC. COIL SA-193
TOP VIEW
I.F. FREQUENCY - 470 KC.
"M" BAND: 600 KC. or 500 METERS
1500 KC. or 200 METERS
"I" BAND: 6 MC. or 50 METERS
"S" BAND: 21.5 MC. or 13.95 METERS
ALIGN "S" BAND FIRST, "I" BAND NEXT, THEN "M"
NOTE
BAND SELECTOR SWITCH SHOWN IN "S" BAND POSITION
REAR VIEW
ALIGNING TRIMMERS LOCATION
"M" BAND OSC. SERIES TRIMMER
"M" BAND OSC. SHUNT TRIMMER
"I" BAND OSC. SHUNT TRIMMER
"S" BAND OSC. SHUNT TRIMMER
"M" BAND ANT. SHUNT TRIMMER
"I" BAND ANT. SHUNT TRIMMER
"S" BAND ANT. SHUNT TRIMMER
FRONT OF CHASSIS, TOP VIEW
ANDREA RADIO CORP.
WOODSIDE, N. Y.
WIRING DIAGRAM "UFG" REC.